



CAGE DWG NO 700056 SH REV 1

| REVISIONS |             |      |          |
|-----------|-------------|------|----------|
| REV       | DESCRIPTION | DATE | APPROVED |
|           |             |      |          |
|           |             |      |          |
|           |             |      |          |

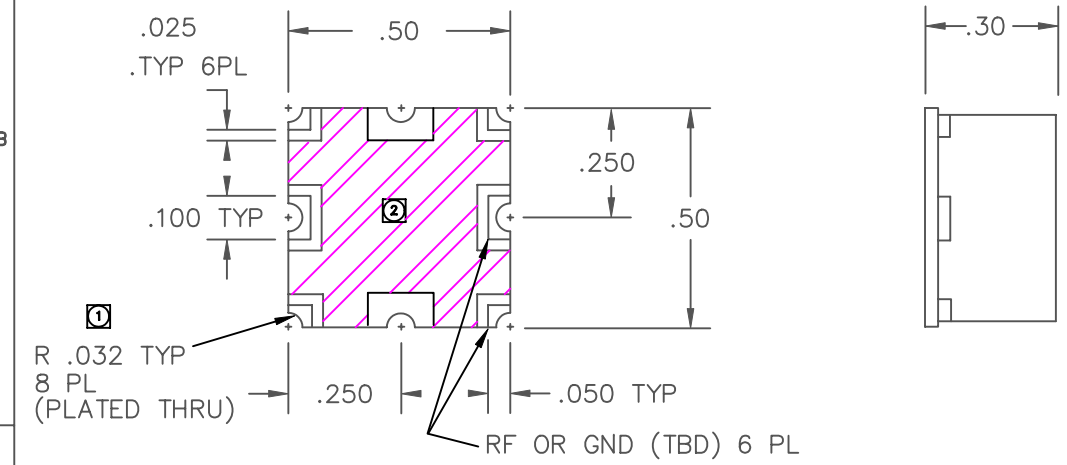

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF BREE ENGINEERING. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF BREE ENGINEERING IS PROHIBITED.

- ② Solder Mask: SR1000, LPI or equivalent.
- ① Location of plated thru holes are to be held at +/- .005.

|  |                  |  |    |                      |           |
|--|------------------|--|----|----------------------|-----------|
| UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES & TOLERANCES ARE:<br>XXX .XXX ANGLES<br>±.005 ±.01 |                  | CAD GENERATED DRAWING DO NOT MANUALLY UPDATE |    | BEE BREE ENGINEERING |           |
| MATERIAL   | PCB-FR4 / NICKEL | DRN  | BE | DATE                 | 07-20-01  |
| MATERIAL   | M/A              | CHK  |    | RESP ENG             |           |
|  |                  | MFG ENG                                      |    | QUAL ENG             |           |
|  |                  | Scale for REFERENCE ONLY                     |    | SIZE                 | CAGE CODE |
|  |                  |  |    | B                    | 1K3H5     |
|  |                  |  |    | DWG NO               | 700056    |
|  |                  |  |    | REV                  | -         |
|  |                  |  |    | SCALE                | 4:1       |
|  |                  |  |    | SHEET                | 1 OF 1    |